

## Information Sheet

### ROSE ROOFING SHED FELT


Suitable for:  
Garden Sheds, Dog Kennels, Rabbit Hutches and Bunkers

#### Fixing Instructions


Fixing is simple but follow instructions carefully to make a sound weatherproof job. At least 24 hours before use unroll felt on a flat surface to remove curling.

#### Pitched or Sloping

1.  
Check roof surface to see that the boards are sound and even. Hammer down any protrusions. Always lay felt from gable to gable starting at the eaves and working up to the ridge. Cut lengths 75mm (3in) longer than the roof length. Lay first sheet in position with bottom edge overlapping 38mm (1 1/2in) at the eaves and the gable ends. Nail along the top edge of the sheet 610mm (2ft) intervals and 20mm (3/4in) from the edge of the sheet. Care must be taken not to nail through board joints.

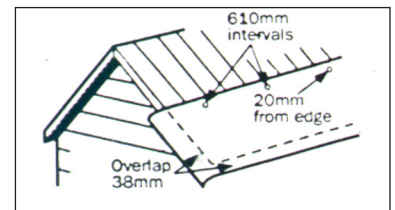

2.  
For the second and successive sheets allow an overlap of not less than 50mm (2in) on the lower sheet, hold the sheet by nailing top edge at 610mm (2ft) intervals along the lap.

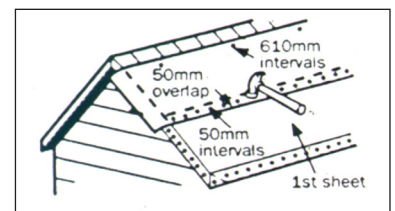

3.  
For increased weatherproofing, paint all laps with adhesive before nailing. When both sides of the roof have been felted use a 305mm (1ft) wide strip for capping the ridge. Carefully centre it along the ridge and nail at 50mm (2in) intervals 20mm (3/4in) from the edge of the strip. Bend edges neatly and nail. Seal exposed nail heads with adhesive for additional waterproofing.

